

TATTLER® is an electric individual row flow monitoring and delivery system.

It's modular design makes it easy to adapt to many configurations, and can be set to handle a wide range of application rates up to 8 GPM per row.

TATTLER controls your application via our built in Rate Controller for exceptional row-to-row uniformity and accuracy, and displays row-by-row diagnostics via your ISOBUS monitor.


Coupled with our SuperCHECK™, TATTLER provides extremely precise row-to-row accuracy.

TATTLER ROW VALVE




Plug and play directly with the CapstanAG PinPoint toolbar rate controller and Supercheck for UNMATCHED ACCURACY AND CONTROL.

RATE CONTROLLER

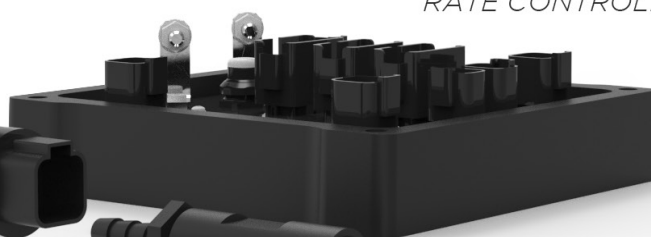

SUPERCHECK

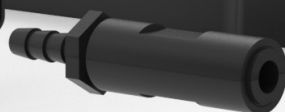

SYSTEM FEATURES:

- ROW-BY-ROW FLOW MONITORING
- EXCEPTIONAL ROW-TO-ROW ACCURACY
- ISOBUS DISPLAY INTEGRATION
- BUILT IN RATE CONTROLLER
- HIGH FLOW CAPACITY
- RETROFIT CAPABILITY



*ISO interface integration for
easy-to-see row monitoring*

Visit us online or your CapstanAG Dealer for a demo
www.capstanag.com • 855-628-7722