

TOOLBAR FEATURES




- Four independent flex hinges across the toolbar and adjustable hydraulic down pressure at each flex point to ensure toolbar follows ground contours extremely well
 - Main wings have 6 degrees up-flex and 13 degrees down-flex
 - Flip wings have 9 degrees up and 8 degrees down
- Fold functions run through one hydraulic block/one remote on tractor
- Hydraulic WingKick standard to tilt outer wings up when toolbar is raised to increase ground clearance



DRY DELIVERY OPTIONS

- Choose from Montag, Lynx Ag, or Salford dry delivery systems
 - Montag
 - 9 ton, GEN 1, single bin (poly tank)
 - 13 ton single or dual bin (stainless steel)
 - Lynx Ag - 14 ton dual bin (stainless steel)
 - Salford ST12 – 12 ton dual bin (poly tanks)
- Blank trailer option to mount a dry delivery system after delivery
- One to four sections for section control, ISO rate controller
- Singles, duals, or CAMSO™ tracks all available

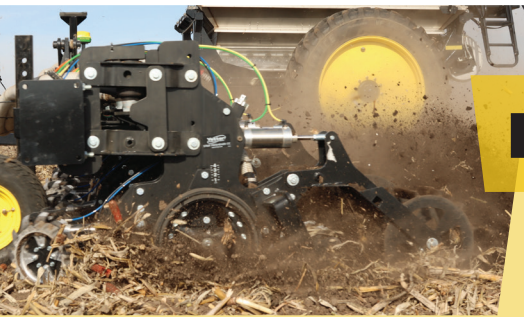

ROW UNIT OPTIONS

Yetter Strip Freshener CC

- Build strips in the fall or spring, or utilize to refresh strips – 10" wide strips
- Provides better ride & consistent seed placement, improving emergence
- In-cab console air pressure control on row unit
 - Adjustable air pressure on row cleaners
 - Adjustable air down-pressure on row units
 - Adjustable air pressure on rolling basket
- Parallel linkage for individual row performance

Yetter Nutrient Pro

- Smooth blade and depth control wheel provides minimal soil disturbance with application depth up to 5"
- Three adjustable down pressure settings and quick adjust depth setting
- Row unit down pressure up to 640 lbs
- Tandem closing system with shark tooth and rubber press wheel



SPECS

DURAPLACER DRY

TRANSPORT WIDTH (FULLY ASSEMBLED)	15'3"
TRANSPORT WIDTH (SHIPPING)	11'6"
TRANSPORT HEIGHT	12'3" (60' TOOLBAR)
TOTAL LENGTH IN TRANSPORT	43'8" (LYNX)
TOTAL WEIGHT (EMPTY)	33,000 LBS (LYNX)